Mullion Mate® Partition Gap Closures

Designed to Accommodate Lateral Movement up to 1-15/16”

Lateral movement in buildings is caused by SEISMIC, THERMAL and WIND SWAY activity. Gordon’s Mullion Mate® products allow lateral movement, while providing a functional termination of a wall at the building envelope and an acoustical barrier.

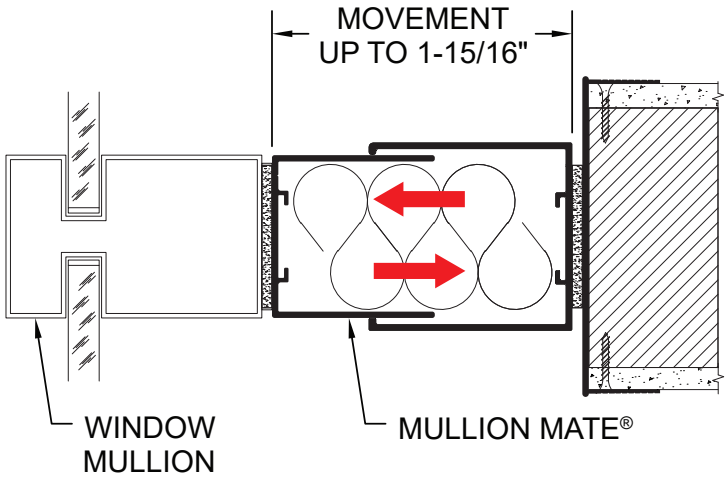

Mullion Mate® spring loaded design accommodates building lateral movement in **both directions** up to 1-15/16” without fear of damage to surrounding glazing or drywall surfaces.

(vs)

Drywall or screw attached options provide zero to minimal (less than 1/4”) accomodation for movement, resulting in cracking and damage to surrounding surfaces.



Seismic | Lateral Movement up to 1-15/16” | STC up to 60 | Industry’s highest % of recycled content | Installs in 5 minutes or less | Antimicrobial Surfaces | Variety of Colors

Test Reports

CERTIFIED TO:
ASTM E1399/E1399M - 97

Mullion Mate® has been tested under ASTM E1399/E1399M-97 (Reapproved 2017) – Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems.

Test Results show that Gordon’s Mullion Mate® Product meets Seismic, Thermal, Wind Sway Cycling Class I - IV Requirements as defined in the Table.

Cycling Requirements

Class	Movement	Minimum Number of Cycles	Cycling Rates (cpm)
I	Thermal	500	less than or equal to 1
II	Wind Sway	500	greater than or equal to 10
III	Seismic	100	greater than or equal to 30
		100	greater than or equal to 30 followed by
IV	Combined	400	greater than or equal to 10

800.747.8954 www.mullionmate.com sales@mullionmate.com